

Figure-1

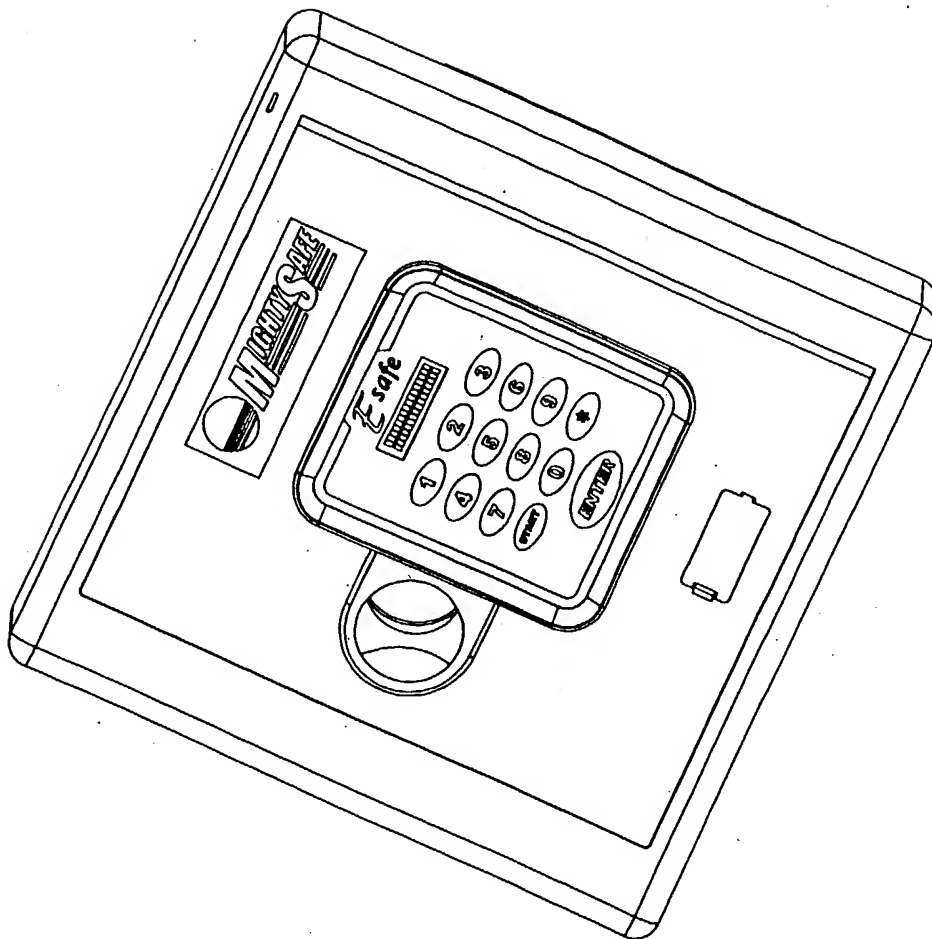


Figure-2

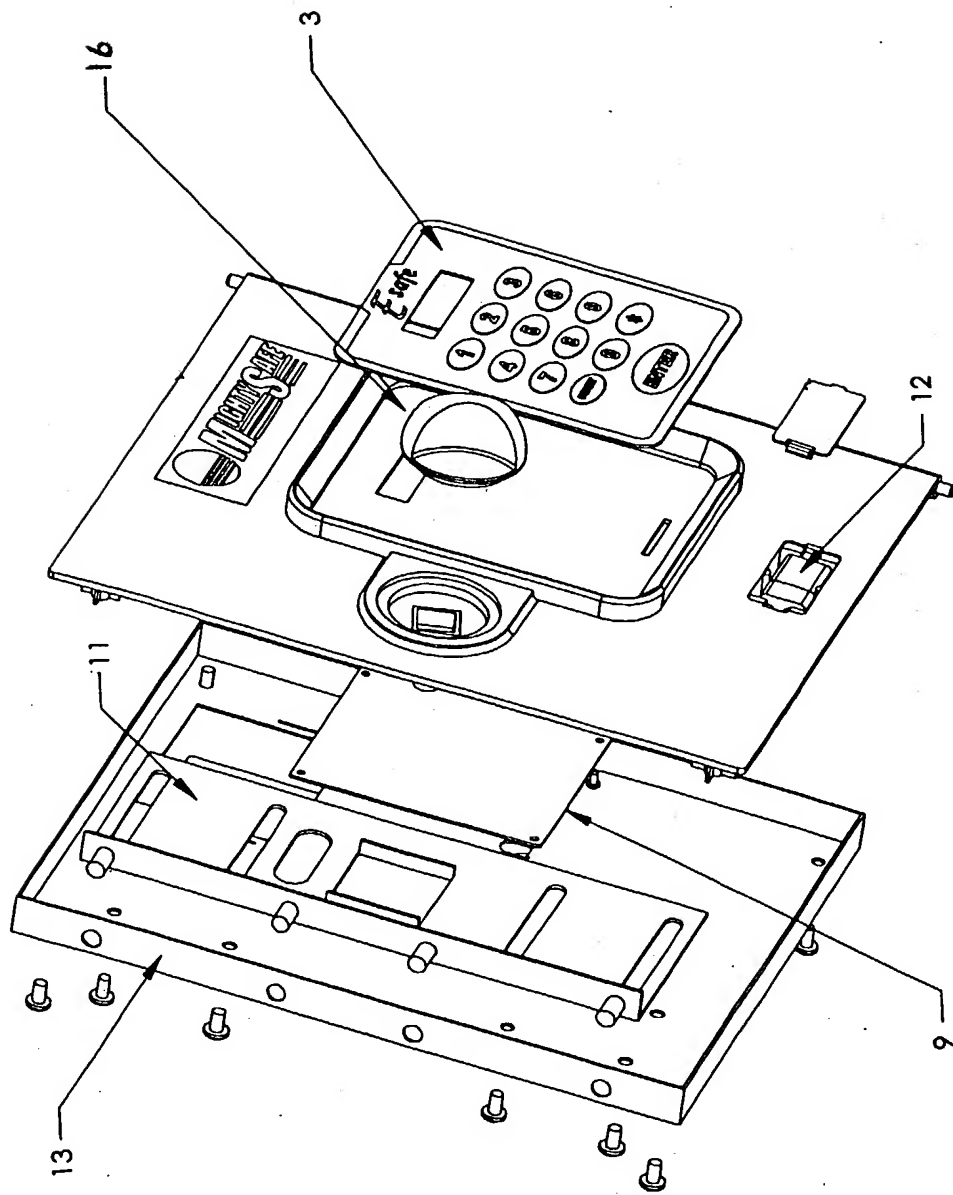
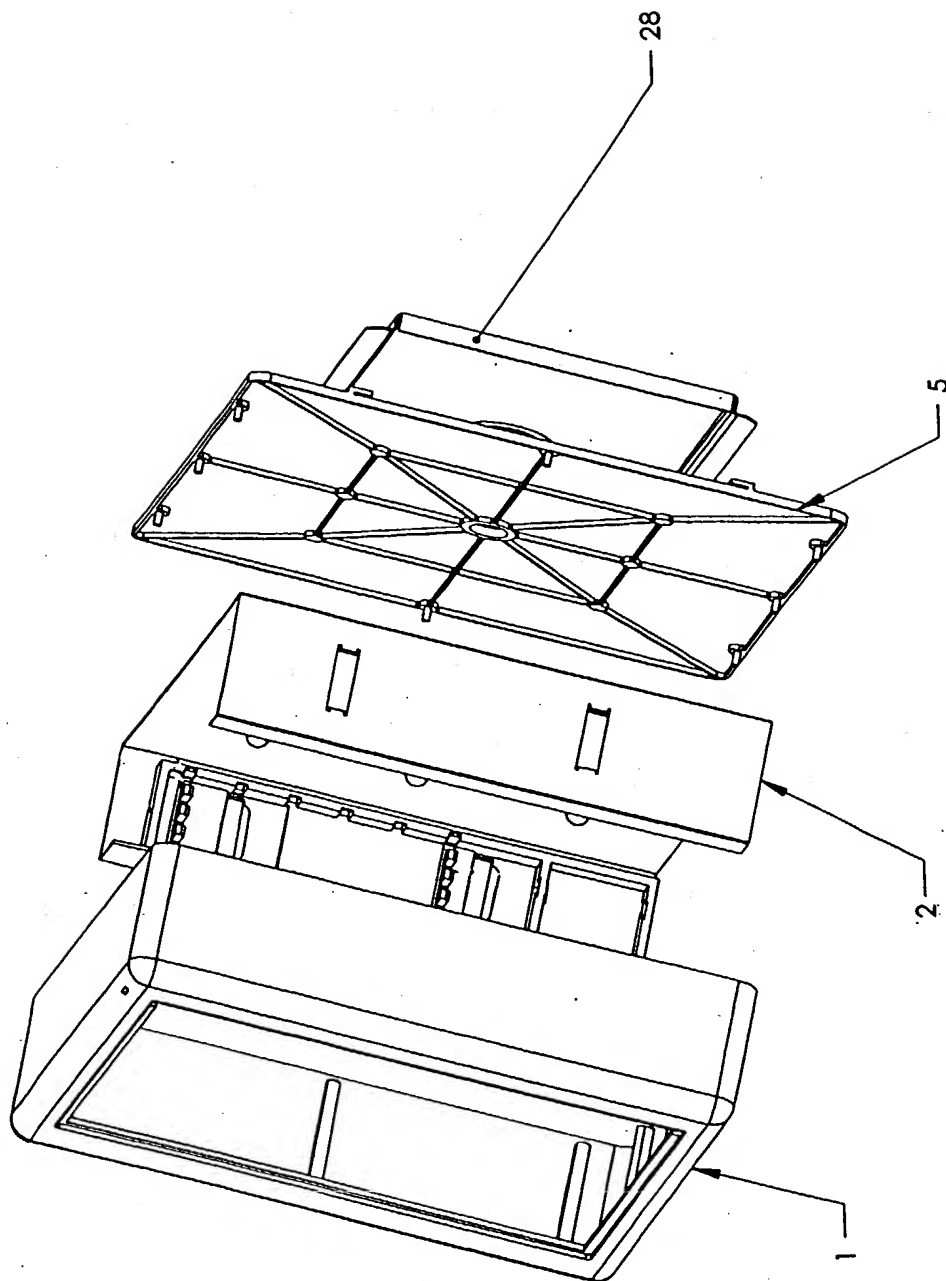
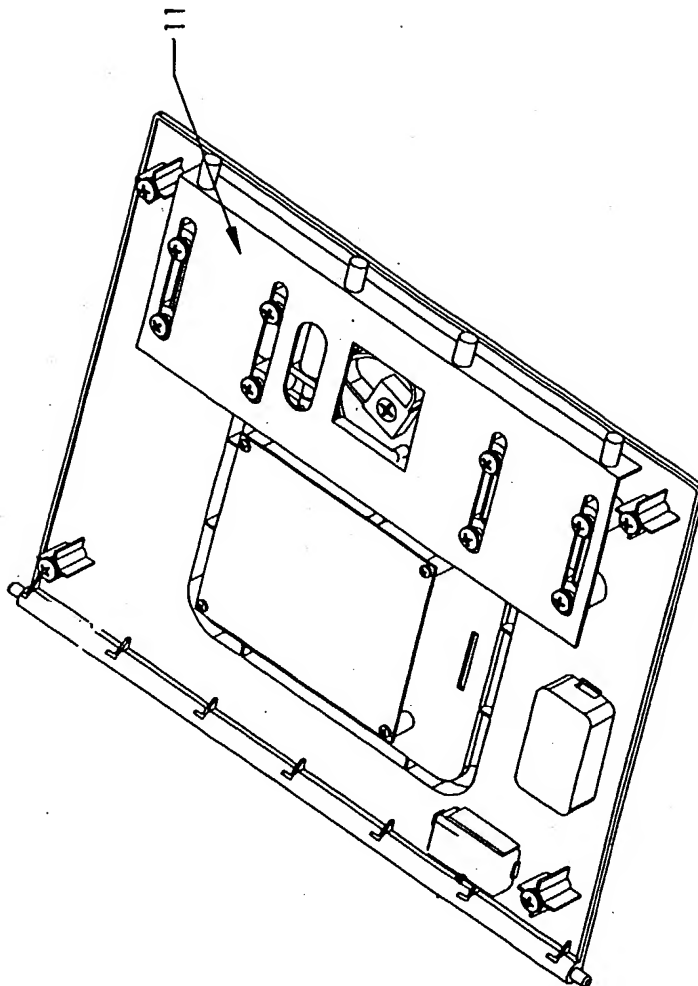


Figure-3



**Figure-4**



**Figure-5**

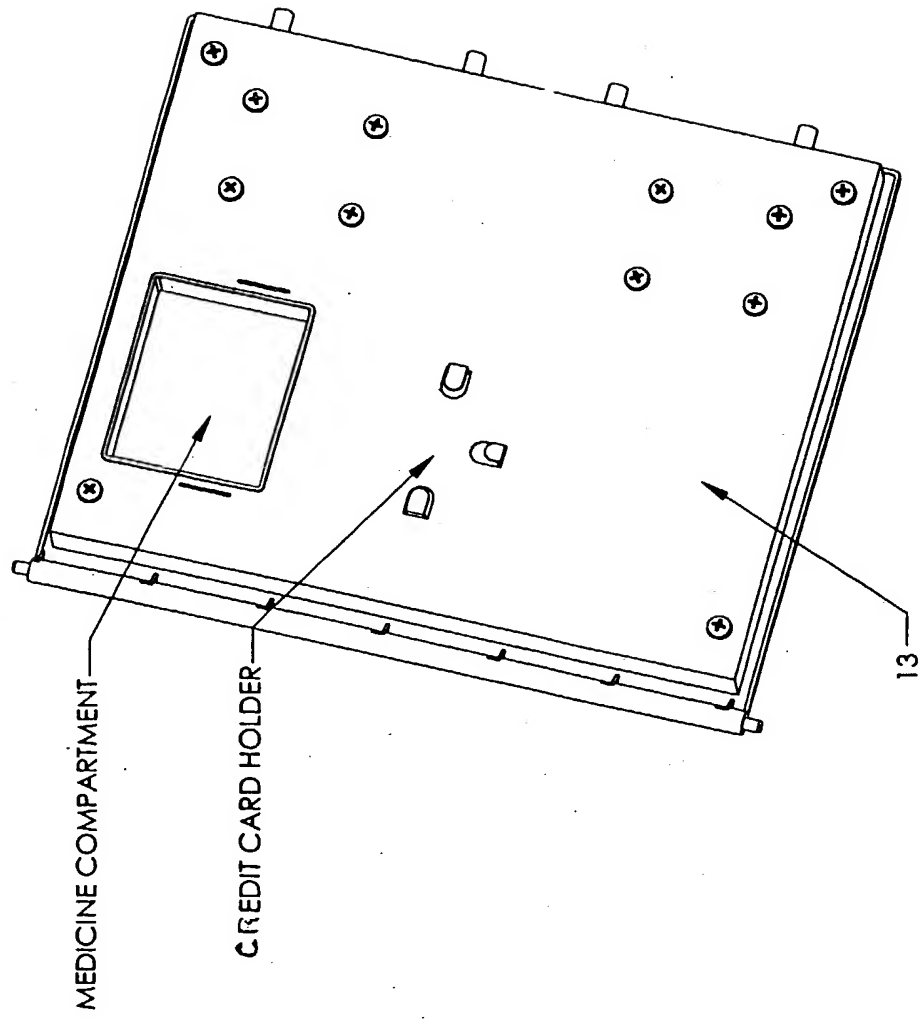
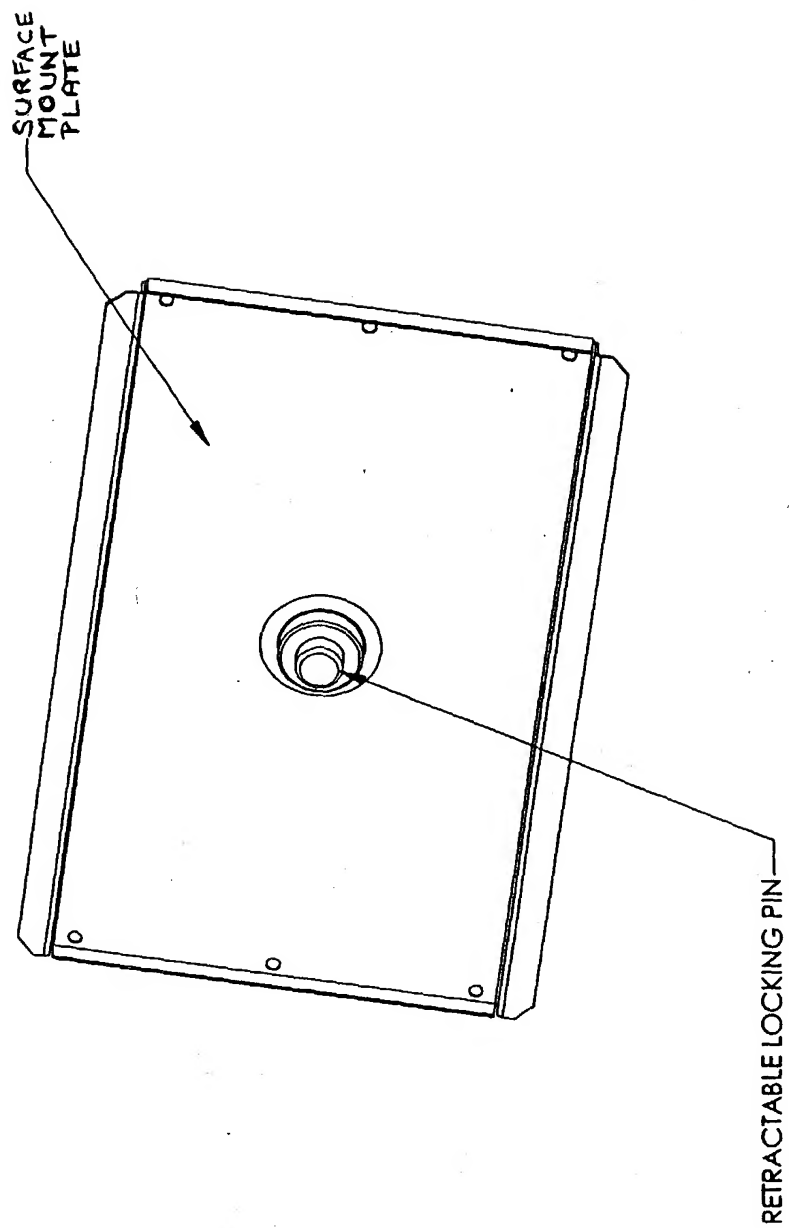


Figure-6



**Figure-7a**

**Electronic Instructions**

1. **'Master Code' = Owner's code**  
Master Code original setting is '0-0-0-0'
2. **Open Safe with Master Code**  
[START] "0-0-0-0" [ENTER]
3. **To Change Master Code**  
[START] [\*] '0-0-0-0' [\*] New Master Code [\*] New Master Code  
[ENTER]  
The Master Code can be from 2 to 8 digits.  
The Master Code cannot contain the START key or the \* key.  
When the Master Code is changed successfully the safe will beep three times.
4. **'Back Door Code' = Safe override code**  
Back Door Code is used to open the safe and to reset the safe Master Code to '0-0-0-0'
5. **To set the Back Door Code**  
[START] [\*] 'Master Code' [\*] [\*] 'Back Door Code' [\*]  
'Back Door Code' [ENTER]
6. **Open Safe with Back Door Code**  
[START] 'Back Door Code' [ENTER]
7. **The Safe has a clock**  
The clock is on for ten seconds.  
The Safe clock will show date and time
8. **Request the Time**  
[START] [ENTER]
9. **Setting the Clock**  
[START] 'MASTER CODE' [\*] [\*] 'ENTER'  
"Press the proper key to show the hour" [\*]  
"Press the proper key to show the minutes" [\*]  
'1' for AM or '2' for PM [ENTER]

**Figure-7b**

10. Setting the Date

START 'MASTER CODE' **[ ]** 2 **[ ]** ENTER

'Press four keys to show the Month and Day' **[ ]** ENTER

For example, October 5<sup>th</sup> would be '1005' or July 7<sup>th</sup> would be '0707'

11. Unauthorized Alarm

This sets an audible alarm for approximately 30 seconds after 25 invalid keystrokes. The audible alarm will stop before 30 seconds if the correct code is entered.

12. Notifying the owner Unauthorized Alarm was set off.

**[ ]** START **[ ]** 'MASTER CODE' **[ ]** ENTER Three beeps will sound off.

Three beeps notify the user that the safe alarm was set off.

13. Safe History

The safe history is to show the user the last twenty openings or combination of openings and unauthorized attempts.

14. Using the Safe History

**[ ]** START **[ ]** 'MASTER CODE' **[ ]** 3 **[ ]** ENTER

The safe will show the user the last opening the code that was used and the date and time of the opening. For five seconds then the previous opening will appear. If the alarm was set off then the safe will read 'Alarm' with date and time.

To stop the history report, press **[ ]** ENTER

15. Additional codes can be entered.

Additional codes can be used to open the safe without privileges the Master Code gets. This is ideal for roommates.

16. Additional Codes

**[ ]** START **[ ]** 'MASTER CODE' **[ ]** 4 Enter New Code **[ ]** New Code **[ ]** ENTER

The safe can take up to 3 additional codes.

17. Removal of Additional Codes

**[ ]** START **[ ]** 'MASTER CODE' **[ ]** 5 **[ ]** ENTER 'ADDITIONAL CODE' **[ ]** ENTER